



Standards
NF C 96-315
MIL-DTL-39030

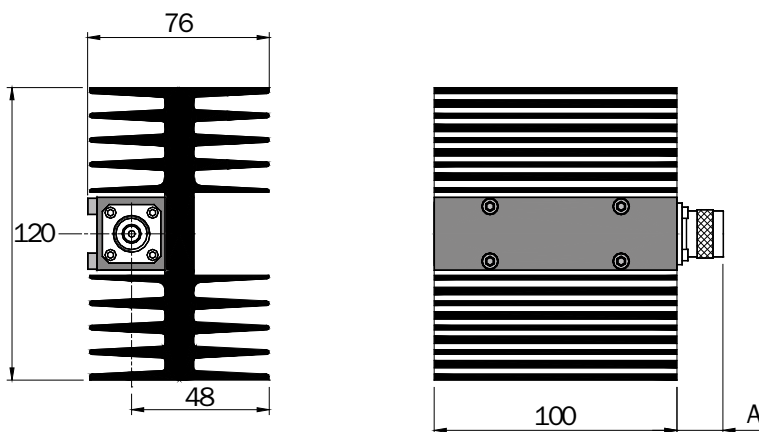

Impedance $50 \Omega \pm 5\%$
 Frequency DC - 6 GHz
 Max VSWR ≤ 1.20 at 6 GHz
 Temperature range -55 to +125 °C
 Average power @ 25 °C 100 W
 Weight 1.1 kg



Dimensions in mm

P/N	Connector	A
17-0449	N f	19
17-0450	N m	21