



# 250 W 6 GHz Attenuator



Standards  
NF C 96-315  
MIL-DTL-3933



Impedance	50 $\Omega$ $\pm$ 5%
Frequency	DC - 6 GHz
Max VSWR	$\leq$ 1.20 at 3 GHz, $\leq$ 1.30 at 6 GHz
Temperature range	-55 to +125°C
Average power @ 25°C	250 W
Weight	3.2 kg

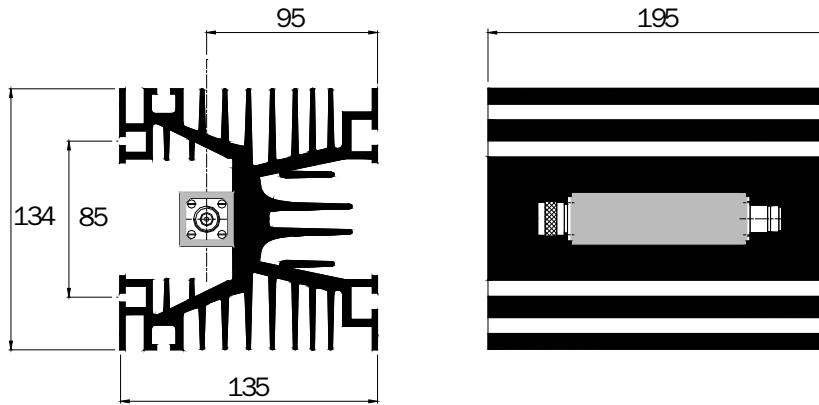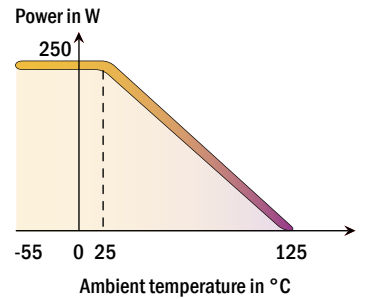

Dimensions in mm

Attenuation (dB)	P/N (N m/f)	Accuracy $\pm\Delta\alpha$ (dB)
3	16-0631	0.75
6	16-0632	0.75
10	16-0633	1
20	16-0634	1
30	16-0635	1
40	16-0636	1

Others attenuations on request