



250 W 6 GHz Load



Standards
NF C 96-315
MIL-DTL-39030



Impedance 50 $\Omega \pm 5\%$
Frequency DC - 6 GHz
Max VSWR ≤ 1.20 at 6 GHz
Temperature range -55 to +125°C
Average power @ 25°C 250 W
Weight 3 kg

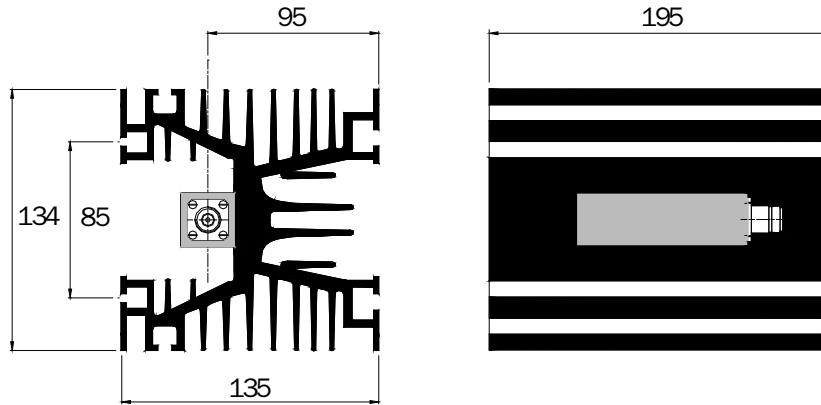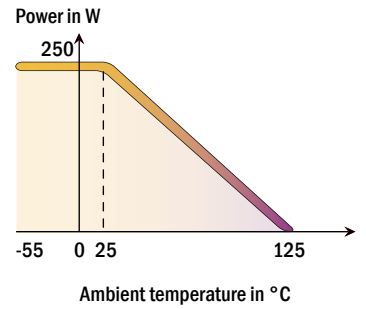

Dimensions in mm

P/N	Connector
17-0443	N f
17-0444	N m